Tube Mop


Tube mops typically clean more surface area before they need to be laundered. The trade-off is that tube mops need more cleaning solution, eliminate less bacteria, and should be laundered in a washing machine. Tube mops are best used in non-environmental service driven applications.

Using microfiber is the responsible thing to do for your business, employees, and the Earth. Due to the fact that less chemicals are used during cleaning, less contaminated water ultimately enters the sewer system. According to the EPA, this can result in up to a 95% reduction in cleaning chemicals in our water supply.



Details

Part Number	Color	Size	Cases Count	
M600011B	Blue	11 oz	1 DOZ/CASE	
M600011G	Green	11 oz	1 DOZ/CASE	
M600011W	White	11 oz	1 DOZ/CASE	
M600014B	Blue	14 oz	1 DOZ/CASE	
M600014G	Green	14 oz	1 DOZ/CASE	
M600014R	Red	14 oz	1 DOZ/CASE	
M600014W	White	14 oz	1 DOZ/CASE	
M600018B	Blue	18 oz	1 DOZ/CASE	
M600018G	Green	18 oz	1 DOZ/CASE	
M600021B	Blue	21 oz	1 DOZ/CASE	
M600021G	Green	21 oz	1 DOZ/CASE	
M600021R	Red	21 oz	1 DOZ/CASE	

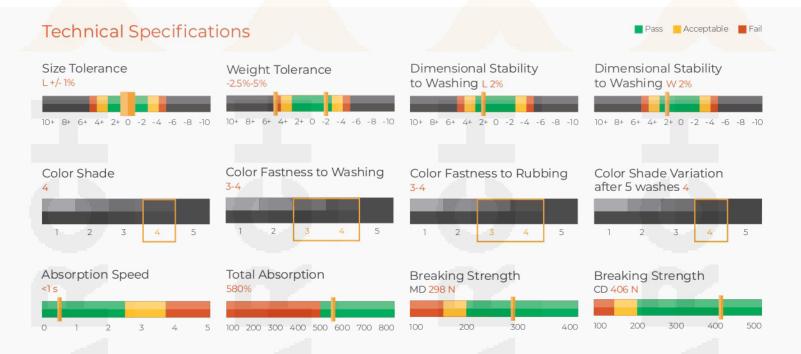

The standards that we are measured by are globally-recognized. The standards that we hold ourselves to are higher.

Size & Weight Tolerance

Since cotton towels are natural woven products, there will be a variation in size and weight when coming off the loom. We use QIMA to measure our towels against industry-standard tolerance levels.

Dimensional Stability to Washing

The GB/T- 8630-2013 standard This standard was developed by the China National Textile and Apparel Council. It specifies a method to determine the dimensional change of textiles after washing and drying. This standard is applicable to textile fabrics, clothing, and other textile products and measures shrinkage after five washes.

Absorption

GB/T 22799-2009 tests the absorbency water into a fabric. GB/T 22799-2009 also tests the initial absorption speed of a fabric. Speed and weight work together to produce a deeper understanding of the fabric's ability to absorb. To pass Absorption Speed a 5"x5" square of fabric must be completely saturated in under five seconds. Total Absorbency is the amount of water absorbed into the fabric at the end of that five seconds.



Buyer beware! Many manufacturers use fabric softener to make their towels seem softer. This reduces the absorbency rate of a towel. Water beads on the surface as the softener clogs the fabric with an impermeable chemical.

Color Shade Standard AATCC

The color change scale consists of nine pairs of grey colored chips, from grades 1 to 5 (with four half steps). Specimens of a given hue match against grey chips. They equate differences in lightness with differences in color. One sample is a control, the other is washed. Grade 5 represents no change, and grade 1 depicts a severe change in some standards.

Color Fastness to Rubbing - "Dry Crocking"

Dry Crocking is done using AATCC^D Crock Meter that rubs a dry piece of sample against a white fabric for a specific time. Then the white piece of fabric was measured against AATCC^D Grayscale for staining to see how much color was migrated.

Color Fastness to Washing - "Wet Crocking"

Dry Crocking is done using AATCC^D Crock Meter that rubs a wet piece of sample against a white fabric for a specific time. Then the white piece of fabric was measured against AATCC^D Grayscale for staining to see how much color was migrated.

Breaking Strength

Fabric breaking strength is also can be called tensile strength, which refers to as the maximum tensile force when the specimen is stretched to break. It is one of the main standards to assess the intrinsic quality of textiles. The unit of fabric breaking strength is "Newton (N)" and it is used to evaluate the capability of the fabric to resist to tensile damage. Microfiber is tested two ways: Machine Direction (MD) is the length of the microfiber roll. Cross Direction is the defined width of the fabric (typically much shorter).

Elongation

Microfiber fabric is stretchable. Elongation is how much you can stretch it without breaking or tearing the fabric against the original size.

The stretched portion of the fabric is converted into a percentage, with 50% being the minimum. Microfiber is tested two ways: Machine Direction (MD) is the length of the microfiber roll. Cross Direction is the defined width of the fabric (typically much shorter).

QIMA



tests for all modern textiles.



AATCC—the American Association of Textile Chemists and Colorists—provides test method development, quality control materials, educational development, and networking for textile and apparel professionals throughout the world.

AATCC®: AATCC Gray Scale for Color Change
AATCCC: AATCC Gray Scale for Staining
AATCCO: AATCC - 9 Step Chromatic Transference Scale
20 AATCC AFU: After 20 Fading (Hours) Units



GuoBiao Chinese National Standards
GB/T standards are the China national standards,
also called as Guobiao Standards, China GB/T
standards are classified as two stages, Mandatory
or Recommended. Mandatory standards have the
force of law as do other technical regulations in
China. They are enforced by laws and administrative
regulations and concern the protection of human
health, personal property and safety.

UnoClean.com (224) 654-6500