


# Product Specifications

**MODEL**  
**30CFO**  
**30CFO-B**

**CATEGORY**  
Circulation

### DESCRIPTION

30" circulation fan with OSHA guards and 2-speed motor with pull chain switch, designed for agriculture, horticulture and industrial use.

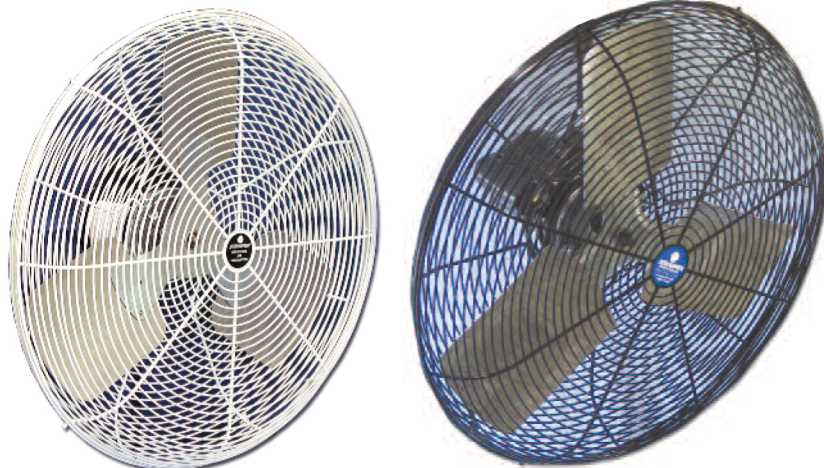

### FEATURES

- Maintenance-free, totally enclosed, thermally protected motor with pre-lubricated ball bearings and two-speed pull chain switch.
- Durable powder coated zinc over steel fan guard meets OSHA requirements.
- Includes ten foot, 115 volt power cord.

### DECIBELS

	High	Low
At fan	83 dB	74 dB
At 25'	72 dB	66 dB


### DIMENSIONS

A = 33-1/2"    B = 7-1/4"    C = 14-1/2"

### PERFORMANCE

CCFM                    9424 / 6996  
Test Number        Schaefer 0202 / Schaefer 0203

AIR THROW        447 ft/min at 25'            281 ft/min at 50'

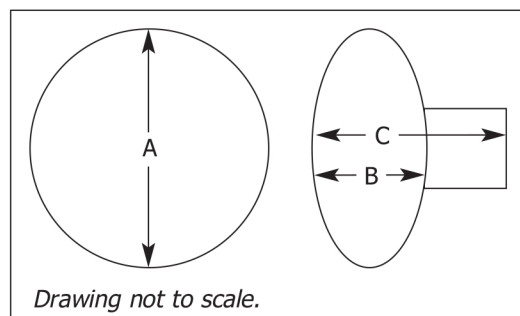

### MOTOR

CS300	1/2 HP	2 Speed	60 Hz	1 Phase	115 Volts	5.2 Amps
Insul = B	CSA Certified	TEAO	1075 RPM	SF = 1	Max 40° C	

### BLADE

AFB-3000SQ    3 Wings            1/2" Bore            Aluminum

### SHIPPING

53 lbs                    34" x 34" x 13"                    UPS = Yes                    Pallet Quantity = 10



**UnoClean.com**  
**1-888-226-2724**

Test data, performance, energy consumption and other specifications are based on results in a controlled environment. Actual results will vary. Product specifications subject to change. ©2011 Schaefer Ventilation Equipment 5-16-12