

# Product Specifications



**MODEL**  
**36PF**  
**36PF-B**  
**36PF-W**

**CATEGORY**  
Circulation

### DESCRIPTION

36" circulation fan with OSHA guards and 2-speed motor with pedestal, designed for agriculture, horticulture and industrial use.

### FEATURES


- Maintenance free, totally enclosed, thermally protected motor with pre-lubricated ball bearings and two-speed pull chain switch.
- Durable powder coated zinc over steel fan guard meets OSHA requirements.
- Includes powder coated 13-16 gauge steel pedestal and ten foot, 115 volt power cord. Wheel kits available.

### DIMENSIONS

A = 40-3/8"    B = 6-3/4"    C = 13-1/2"    D = 32"

### PERFORMANCE

CCFM                    12,121 / 8753  
Test Number        Schaefer 0064 / Schaefer 0065

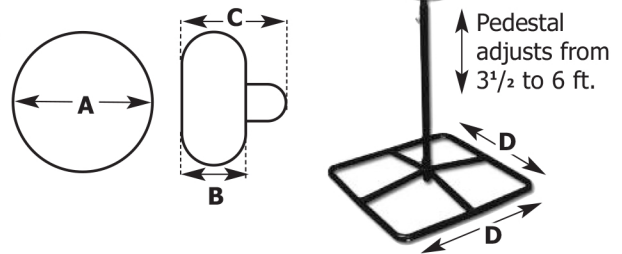

### MOTOR

CS300	1/2 HP	2 Speed	60 Hz	1 Phase	115 Volts	5.2 Amps
Insul = B	CSA Certified	TEAO	1075 RPM	SF = 1	Max 40° C	

### BLADE

AFB-3600    3 Wings    1/2" Bore    Aluminum

### SHIPPING

Fan	59 lbs	41" x 41" x 15"	UPS = No	Pallet Quantity = 5
Pedestal	28 lbs	36" x 7" x 34"	UPS = Yes	Pallet Quantity = 8



**UnoClean.com**  
**1-888-226-2724**