

# OneShot®

## Low Profile Automatic Soap System

**402241**  
Chrome

### Touch-Free & Trouble-Free Hand Soap System

The automatic touch-free sensor eliminates cross-contamination.

#### System Features

- SmartSensor™ detects user's hand to automatically dispense OneShot® of soap.
- Red LED light blinks when refill is low.
- Yellow LED light blinks when battery life is low.  
- Average battery life 100 refills or 2 years
- Reset button automatically resets low refill light and primes new soap refill.
- Optional spacer included if the sink rim is 3/4" high or greater.

#### System Specifications

- Capacity: 800mL / 27oz. or 1600mL / 54oz.
- Bright polished chrome spout cover
- Mount through 1" (25mm) diameter hole in lavatory or countertop
- Maximum counter thickness 2" (50.8mm)
- Battery Requirements: 4 Alkaline D Cells (*not included*)
- Activation range is 3" from sensors

#### • Dispenser: #402241

Case Pack: 4 Case Weight: 9 lbs. Case Cube: 1.15

#### • Soap Refills: 800mL

- #401311 - Lotion Hand Soap with Moisturizers
- #401312 - Antibacterial Hand Soap
- #401313 - Pure & Natural® Hand Soap


Case Pack: 4 Case Weight: 9 lbs. Case Cube: .33

#### • Soap Refills: 1600mL

- #401541 - Lotion Hand Soap with Moisturizers
- #401542 - Antibacterial Hand Soap
- #401543 - Pure & Natural® Hand Soap

Case Pack: 4 Case Weight: 18 lbs. Case Cube: .50

#### • Optional Spacer: (included)

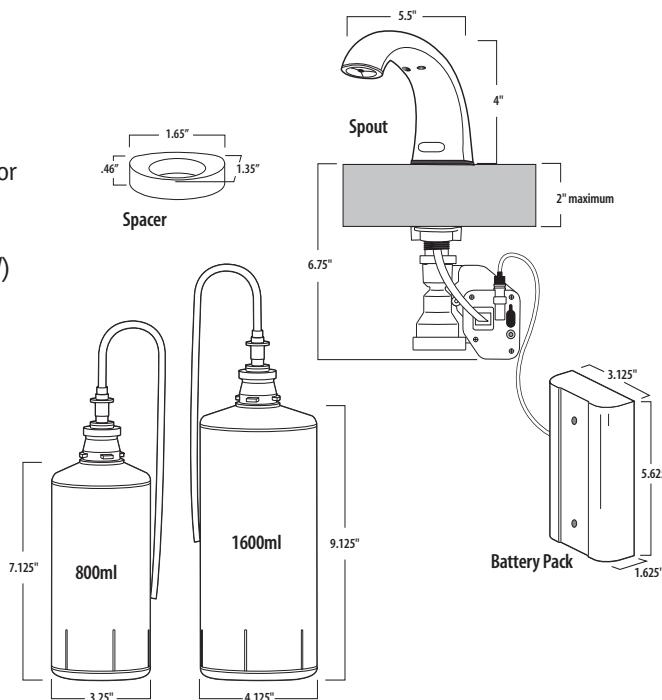

**World Headquarters:**  
Serving North & South America  
**Technical Concepts LLC**  
1301 Allanson Road  
Mundelein, Illinois 60060 U.S.A.  
Phone: 847-837-4100  
Fax: 1-800-551-5046

**European Headquarters:**  
Serving Europe, Africa & Middle East  
**Technical Concepts International Ltd.**  
Pin Green Business Park Eastman Way  
Stevenage, Herts SG1 4UH, England  
Phone: +44 (0)870 568 6824  
Fax: +44 (0)1438 311200

**Asian Headquarters:**  
Serving Asia & Pacific  
**Technical Concepts Asia**  
No. 887, Plot 214A, Jalan Perindustrian Bukit  
Minyak, Kawasan Perindustrian Bukit  
Minyak, Mukim 13, Bukit Minyak, Seberang  
Perai Tengah, 14100, Penang, Malaysia  
Phone: (60) 4 508 5008  
Fax: (60) 4 508 5001

**Toll Free: 1-800-551-5155**

**Web: [www.technicalconcepts.com](http://www.technicalconcepts.com)**

**Email: [info@technicalconcepts.com](mailto:info@technicalconcepts.com)**

## ***OneShot® Low Profile Automatic Soap System Quick Installation Instructions***

1. Mount OneShot® Low Profile dispenser in counter top.
2. Insure all components and wires are installed/connected properly.
3. Before installing refill, insure the tube on the refill bottle is fully inserted into the actuator/pump assembly.
4. Next, unlock pump on refill by twisting counter-clockwise. Actuator will pop up.
5. Guide refill tube up through bottom of motor assembly and up the spout.
6. Lock soap refill into place by turning clockwise a 1/4 turn.
7. **IMPORTANT - Press the Red refill reset button. This will automatically prime the soap refill bottle.**

## ***OneShot® Low Profile Automatic Soap System Frequently Asked Questions***

What does the red flashing light mean?

***It indicates the refill is low.***

***Please check fill level & change as needed.***

Why is the red light still flashing after the refill has been replaced?

***The RED reset button was not pressed after the new refill was installed.***

***Please press RED read button.***

What does the yellow flashing light mean?

***It indicates the batteries are low.***

***Change batteries if flashing, use ONLY "D" cell alkaline batteries.***