# OneShot®

### Touch-Free Liquid Soap System



Sets the standard for reliability in countermounted dispensing systems utilizing patented SmartSensor™ technology to detect hands and automatically deliver the perfect amount of soap every time.

### **System Features:**

- SmartSensor<sup>™</sup> detects user's hand to automatically dispense OneShot<sup>™</sup> of soap.
- Red LED light status blink to when refill is low.
- Yellow LED light status blink to when battery life is low.
- Reset button automatically resets low refill light and primes new soap refill.
- Optional spacer included if the sink rim is 3/4" high or greater.

### **System Specifications:**

- Capacity: 800ml / 27oz. or 1600ml / 54oz.
- Bright polished chrome spout cover
- Mount through 1" (25mm) diameter hole in lavatory or countertop
- Maximum counter thickness 2" (50.8mm)
- Battery Requirements: 4 Alkaline D Cells (not included)
- Battery Life: 120,000 hand wash or 3 years, whenever comes first
- Activation range is 4" from sensor lens





### **OneShot Dispensers:**

Stock #	Description
404040	D: 0

**401310**..... Dispenser - Chrome

402073.... Dispenser - Chrome (See Cover)

**401527**..... Dispenser - Brilliant Brass **401528**..... Dispenser - Brushed Chrome

401832..... Dispenser - Metal/Chrome Finish


Case Pack:4 Case Weight:10 lbs. Case Cube:1.15ft3

Refill(s) Pix

### **OneShot Refills:**

800ml	1600ml	Description
401313	401543	Pure & Natural Lotion Hand Soap
402363	402364	Free 'n Clean
401311	401541	Lotion w/Moisturizer
401312	401542	Antimicrobial

800ml - Case Pack: 4 Case Weight: 0.9lbs. Case Cube: 0.33ft3 1600ml - Case Pack: 4 Case Weight: 1.8lbs. Case Cube: 0.5ft3

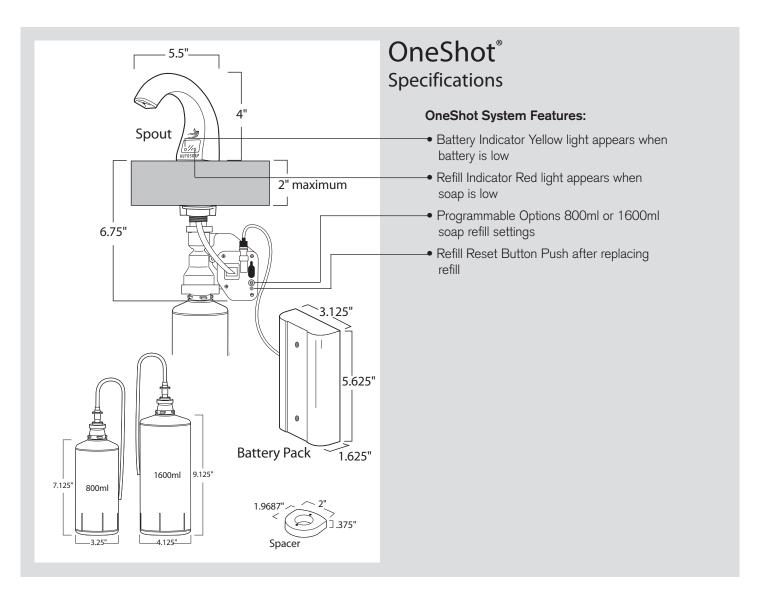

## OneShot® Touch-Free Soap System Quick Installation Instructions

- 1. Mount OneShot dispenser in counter top.
- 2. Insure all components and wires are installed/connected properly.
- 3. Before installing refill, insure the tube on the refill bottle is fully inserted into the actuator/pump assembly.
- 4. Next, unlock pump on refill by twisting counter-clockwise. Actuator will pop up.
- 5. Guide refill tube up through bottom of motor assembly and up the spout.
- 6. Lock soap refill into place by turning clockwise a 1/4 turn.
- 7. IMPORTANT Press the Red refill reset button. This will automatically prime the soap refill bottle.

#### Compliance:

Designed to meet A.D.A. requirements.

### Warranty:

3 years against defects in parts and workmanship.







technicalconcepts.com

### World Headquarters:

Serving North and South America

Technical Concepts LLC 1301 Allanson Road Mundelein, Illinois 60060 U.S.A. **Toll Free: 1-800-551-5155** 

Fax: 1-800-551-5046

### European Headquarters:

Serving Europe, Africa and Middle East

Technical Concepts International Ltd. Peterborough, PE2 6WA, England Phone: +44 (0)870 568 6824

### Asian Headquarters:

Serving Asia and Pacific

Technical Concepts Asia 14100, Penang, Malaysia Phone: (60) 4 508 5008

