

## Portable Pressurized and On-Site Eyewashes

### On-Site Heater Jacket Retrofit Kit



#### □ S19-921HR (pedestal not included)

- Protects against freezing down to -20°F (-29°C)
- Insulated heater jacket conceals a 121-watt heater
- Secondary thermostat prevents overheating if primary thermostat fails
- All UL-listed components; requires 120-volt AC

### On-Site Waste Cart



#### □ S19-399

- High-visibility yellow
- Captures used fluid; 56-gallon capacity
- Tapered sump, easy to drain

### Heater Jacket Retrofit Kits for Portable Pressurized Eyewash Tanks



Thermostatically controls water in weather conditions down to -10°F (-23°C); uses standard 120 VAC. Tanks not included

#### □ S19-671HR (shown at right)

Heater jacket retrofit kit for 5-gallon tank

#### □ S19-690HR (shown at left)

Heater jacket retrofit kit for 10-gallon tank

#### □ S19-788HR (shown at center)

Heater jacket retrofit kit for 15-gallon tank

### Transport Cart for Pressurized Eyewash Tanks



#### □ S19-690A

Four-wheel stainless steel transport cart. For use with eyewash tanks without heater jackets (eyewash tanks not included)

## Drench Hose Spray Kits



#### □ S19-430EH

Drench hose spray kit with valve, drench hose sprayhead, hose, inspection tag and hardware. For use with eyewashes; provides a body water drench




#### □ S19-430SH

Drench hose spray kit with valve, drench hose sprayhead, hose, inspection tag and hardware. For use with drench showers; provides a body water drench

## Flow Switch Alarm Systems

- Automatic, audible and visual alarm system
- Activates when unit is in use; preassembled
- Basic alarm meets NEMA 3 code (waterproof)
- Requires minimum of 2 GPM water flow to activate
- 1¼" NPT inlet piping

### Standard Alarms for Drench Showers or Combination Units

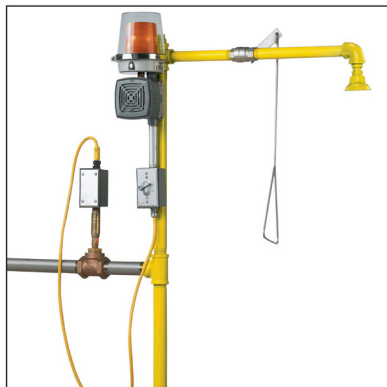

- ☐ **S19-320**  
Shower/combination alarm with 6' cord (120 volt)
- ☐ **S19-320B**  
Shower/combination alarm with 6' cord and 120/24V AC transformer
- ☐ **S19-320C**  
Shower/combination alarm with 12' cord (120 volt)
- ☐ **S19-320E**  
Shower/combination alarm with 12' cord and 120/24V AC transformer

### Explosion-Proof Class 1 Division 1 Alarm Systems



- ☐ **S19-320EXP1A**  
Shower/combination alarm (120 volt) rated Class 1; Division 1; Groups C and D explosion proof
- ☐ **S19-320EXP1B**  
Shower/combination alarm (220 volt) rated Class 1; Division 1; Groups C and D explosion proof

### Explosion-Proof Class 1 Division 2 Alarm Systems



- ☐ **S19-320EXP120**  
Shower/combination alarm (120 volt) rated Class 1; Division 2; Groups B, C, and D explosion proof
- ☐ **S19-320EXP220**  
Shower/combination alarm (220 volt) rated Class 1; Division 2; Groups B, C, and D explosion proof

## Alarms for Eye or Eye/Face Washes

- ☐ **S19-320A**  
½" NPT with 6' cord
- ☐ **S19-320D**  
½" NPT with 12' cord

## Shower Accessories

### Privacy Curtain



#### □ S19-330

- Provides privacy to shower user in emergency situations
- Universal mounting
- 3-ply, vinyl laminate, curtain reinforced at top and bottom
- Chemical and mildew resistant; waterproof
- High-visibility yellow color
- Dimensions: 70"L x 145"W
- Stainless steel, corrosion resistant curtain rail and mounting brackets
- Rail dimensions: 1½" x 42" diameter
- Not compatible with barrier-free, PVC and heat trace units – contact Bradley for more information

### Drench Shower Tester



#### □ S19-330ST

- Heavy-duty tester for required weekly activation
- Watertight funnel with weighted bottom
- 84" long with 8' telescoping aluminum handle
- Includes testing record card

## Classic Accessories

### Retrofit Classic Dust Covers



#### □ S45-1964

For use with any Bradley plastic eyewash bowl. Plastic bowl, dust cover, gasket and hardware



#### □ S45-2396

For use with any Bradley eyewash bowl. Stainless steel "clam shell" cover and bowl, stainless steel handle, tether and quick release pin