


# Use and maintenance

## Operating guidelines AS4325B



Turn on the machine and verify there is enough battery power to complete the work. Charge batteries if required.

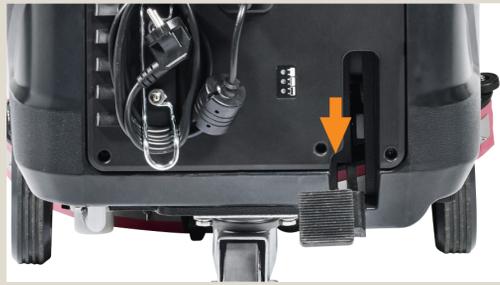

Lift the deck by pressing the pedal



Place the brush or the pad-holder under the deck and Lower the deck or the brush/pad-holder by pressing the pedal



With the machine on, press one of the safety switches to engage the brush/pad-holder, then release it. If necessary, repeat the procedure until the brushes/pad-holder is engaged. The squeegee is raised and lowered with the deck.



Remove the red cover, fill the tank with clean water and use maximum temperature 40 degree. Add appropriate low foaming detergent according to dosage information.



Check the solution level the red ball on the left side of the machine.



Start cleaning by placing the hands on the safety switches



Press the + or - buttons to increase / decrease the solution flow rate.



Lift the squeegee up by hand until it locks in up position and turn suction off for double scrubbing. To go back to working mode, use the red lever to release the squeegee. and turn suction on again.



When scrubbing is complete, turn off the machine to perform the following maintenance

# Maintenance

## Operating guidelines AS4325B



When scrubbing is complete, turn off the on/off button to perform the following maintenance.



**Daily:** Empty the clean water tank using the solution tank drain knob under the machine.



**Daily:** Empty the recovery tank using the recovery empty hose. Bend the soft part before removing the cap to control the flow.



**Daily:** Inspect and rinse the float ball cage and inspect and clean the lid gasket if required.



**Daily:** Remove the squeegee, and clean. Inspect the blades and flip them or replace them if required.



**Daily:** With the machine turned on and the deck lifted, press the click off button to release the brush/ pad holder then clean and inspect before next use.



**Weekly:** Inspect the solution filter and clean if required.



**Daily:** Leave the recovery tank lid open to let the tank dry after it's been cleaned to avoid bad odor.



**Daily:** Charge the batteries: Connect the battery charger cable to the electrical socket. Light turns red when charging and green when the charging is complete.

Local Viper dealer: \_\_\_\_\_

Phone number: \_\_\_\_\_

SN: \_\_\_\_\_